

JCS4N65B

主要参数 MAIN CHARACTERISTICS

I_D	4.0 A
V_{DS}	650 V
$R_{DS(on)}$ ($V_{GS}=10V$)	2.4 Ω
$-Max$	
Q_g-Typ	16.3nC

用途

- 高频开关电源
- 电子镇流器
- UPS 电源

产品特性

- 低栅极电荷
- 低 C_{RSS} (典型值 2.83pF)
- 开关速度快
- 产品全部经过雪崩测试
- 高抗 dv/dt 能力
- RoHS 产品








APPLICATIONS

- High efficiency switch mode power supplies
- Electronic lamp ballasts based on half bridge
- UPS

FEATURES

- Low gate charge
- Low C_{RSS} (typical 2.83pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product

封装 Package



订货信息 ORDER MESSAGE

订 货 型 号 Order codes				印 记 Marking	封 装 Package
有卤-条管 Halogen-Tube	无卤-条管 Halogen-Free-Tube	有卤-编带 Halogen-Reel	无卤-编带 Halogen-Free-Reel		
JCS4N65VB-V-B	JCS4N65VB-V-BR	N/A	N/A	JCS4N65VB	IPAK
JCS4N65RB-R-B	JCS4N65RB-R-BR	JCS4N65RB-R-A	JCS4N65RB-R-AR	JCS4N65RB	DPAK
JCS4N65BB-B-B	JCS4N65BB-B-BR	N/A	N/A	JCS4N65BB	TO-262
JCS4N65SB-S-B	JCS4N65SB-S-BR	JCS4N65SB-S-A	JCS4N65SB-S-AR	JCS4N65SB	TO-263
JCS4N65CB-C-B	JCS4N65CB-C-BR	N/A	N/A	JCS4N65CB	TO-220C
JCS4N65FB-F-B	JCS4N65FB-F-BR	N/A	N/A	JCS4N65FB	TO-220MF
JCS4N65FB-F2-B	JCS4N65FB-F2-BR	N/A	N/A	JCS4N65FB	TO-220MF-K2
JCS4N65VB-V1-B	JCS4N65VB-V1-BR	N/A	N/A	JCS4N65VB	IPAK-S1



绝对最大额定值 ABSOLUTE RATINGS (Tc=25℃)

项 目 Parameter	符 号 Symbol	数 值 Value				单 位 Unit
		JCS4N 65VB/R B	JCS4N65CB /SB/BB	JCS4N6 5FB(TO- 220MF)	JCS4N65F B(TO-220 MF-K2)	
最高漏极-源极直流电压 Drain-Source Voltage	V_{DSS}	650				V
连续漏极电流 Drain Current -continuous	I_D T=25℃ T=100℃	4.0		4.0*		A
		3.0		2.5*		A
最大脉冲漏极电流 (注1) Drain Current - pulse (note 1)	I_{DM}	16		16*		A
最高栅源电压 Gate-Source Voltage	V_{GSS}	±30				V
单脉冲雪崩能量 (注2) Single Pulsed Avalanche Energy (note 2)	E_{AS}	240				mJ
雪崩电流 (注1) Avalanche Current (note 1)	I_{AR}	4.0				A
重复雪崩能量 (注1) Repetitive Avalanche Current (note 1)	E_{AR}	10.0				mJ
二极管反向恢复最大电压变化速率 (注3) Peak Diode Recovery dv/dt (note 3)	dv/dt	5.5				V/ns
耗散功率 Power Dissipation	P_D T _C =25℃ -Derate above 25℃	117.9	148.6	51.7	42.4	W
		0.943	1.189	0.41	0.34	W/ ℃
绝缘耐压 (t=1s; TC =25℃) Insulation withstand voltage	VISO	—	—	2500	2500	V
最高结温及存储温度 Operating and Storage Temperature Range	T _J , T _{STG}	-55~+150				℃
引线最高焊接温度 Maximum Lead Temperature for Soldering Purposes	T _L	300				℃

*漏极电流由最高结温限制

*Drain current limited by maximum junction temperature

电特性 ELECTRICAL CHARACTERISTICS

项 目 Parameter	符 号 Symbol	测试条件 Tests conditions	最小 Min	典型 Typ	最大 Max	单 位 Units
关态特性 Off –Characteristics						
漏—源击穿电压 Drain-Source Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	650	-	-	V
击穿电压温度特性 Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	$I_D=250\mu A$, referenced to $25^\circ C$	-	0.65	-	V/ $^\circ C$
零栅压下漏极漏电流 Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V, V_{GS}=0V, T_C=25^\circ C$	-	-	10	μA
		$V_{DS}=500V, T_C=125^\circ C$	-	-	100	μA
正向栅极体漏电流 Gate-body leakage current, forward	I_{GSSF}	$V_{DS}=0V, V_{GS}=30V$	-	-	100	nA
反向栅极体漏电流 Gate-body leakage current, reverse	I_{GSSR}	$V_{DS}=0V, V_{GS}=-30V$	-	-	-100	nA
通态特性 On-Characteristics						
阈值电压 Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D=250\mu A$	2.0	-	4.0	V
静态导通电阻 Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=2A$	-	1.7	2.4	Ω
正向跨导 Forward Transconductance	g_{fs}	$V_{DS}=40V, I_D=2A$ (note 4)	-	4.1	-	S
动态特性 Dynamic Characteristics						
输入电容 Input capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V, f=1.0MHz$	-	671.8	900	pF
输出电容 Output capacitance	C_{oss}		-	72.5	124	pF
反向传输电容 Reverse transfer capacitance	C_{rss}		-	2.83	12	pF

电特性 ELECTRICAL CHARACTERISTICS

开关特性 Switching Characteristics							
延迟时间 Turn-On delay time	$t_d(\text{on})$	$V_{DD}=300V, I_D=4A, R_G=25\Omega$ (note 4, 5)	-	22.7	42	ns	
上升时间 Turn-On rise time	t_r		-	20	111	ns	
延迟时间 Turn-Off delay time	$t_d(\text{off})$		-	43.2	102	ns	
下降时间 Turn-Off Fall time	t_f		-	17.6	84	ns	
栅极电荷总量 Total Gate Charge	Q_g	$V_{DS}=480V$, $I_D=4A$ $V_{GS}=10V$ (note 4, 5)	-	16.3	32	nC	
栅—源电荷 Gate-Source charge	Q_{gs}		-	3.84	-	nC	
栅—漏电荷 Gate-Drain charge	Q_{gd}		-	7.15	-	nC	
漏—源二极管特性及最大额定值 Drain-Source Diode Characteristics and Maximum Ratings							
正向最大连续电流 Maximum Continuous Drain -Source Diode Forward Current	I_S		-	-	4	A	
正向最大脉冲电流 Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}		-	-	16	A	
正向压降 Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V, I_S=4.0A$	-	-	1.4	V	
反向恢复时间 Reverse recovery time	t_{rr}	$V_{GS}=0V, I_S=4.0A$ $dI_F/dt=100A/\mu s$ (note 4)	-	480	-	ns	
反向恢复电荷 Reverse recovery charge	Q_{rr}		-	2.08	-	μC	

热特性 THERMAL CHARACTERISTIC

项 目 Parameter	符 号 Symbol	最大 Max				单位 Unit
		JCS4N6 5VB/RB	JCS4N65C B/SB/BB	JCS4N65FB (TO-220MF)	JCS4N65FB (TO-220MF-K2)	
结到管壳的热阻 Thermal Resistance, Junction to Case	$R_{th(j-c)}$	1.06	0.841	2.42	2.95	$^{\circ}C/W$
结到环境的热阻 Thermal Resistance, Junction to Ambient	$R_{th(j-A)}$	80.2	60.2	41.56	46.78	$^{\circ}C/W$


注释:

- 1: 脉冲宽度由最高结温限制
- 2: $L=25mH, I_{AS}=4.0A, V_{DD}=50V, R_G=25\Omega$, 起始结温 $T_J=25^{\circ}C$
- 3: $I_{SD} \leq 4.0A, di/dt \leq 200A/\mu s, V_{DD} \leq BV_{DSS}$, 起始结温 $T_J=25^{\circ}C$
- 4: 脉冲测试: 脉冲宽度 $\leq 300\mu s$, 占空比 $\leq 2\%$
- 5: 基本与工作温度无关

Notes:


- 1: Pulse width limited by maximum junction temperature
- 2: $L=25mH, I_{AS}=4.0A, V_{DD}=50V, R_G=25\Omega$, Starting $T_J=25^{\circ}C$
- 3: $I_{SD} \leq 4.0A, di/dt \leq 200A/\mu s, V_{DD} \leq BV_{DSS}$, Starting $T_J=25^{\circ}C$
- 4: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$
- 5: Essentially independent of operating temperature

特征曲线 ELECTRICAL CHARACTERISTICS (curves)

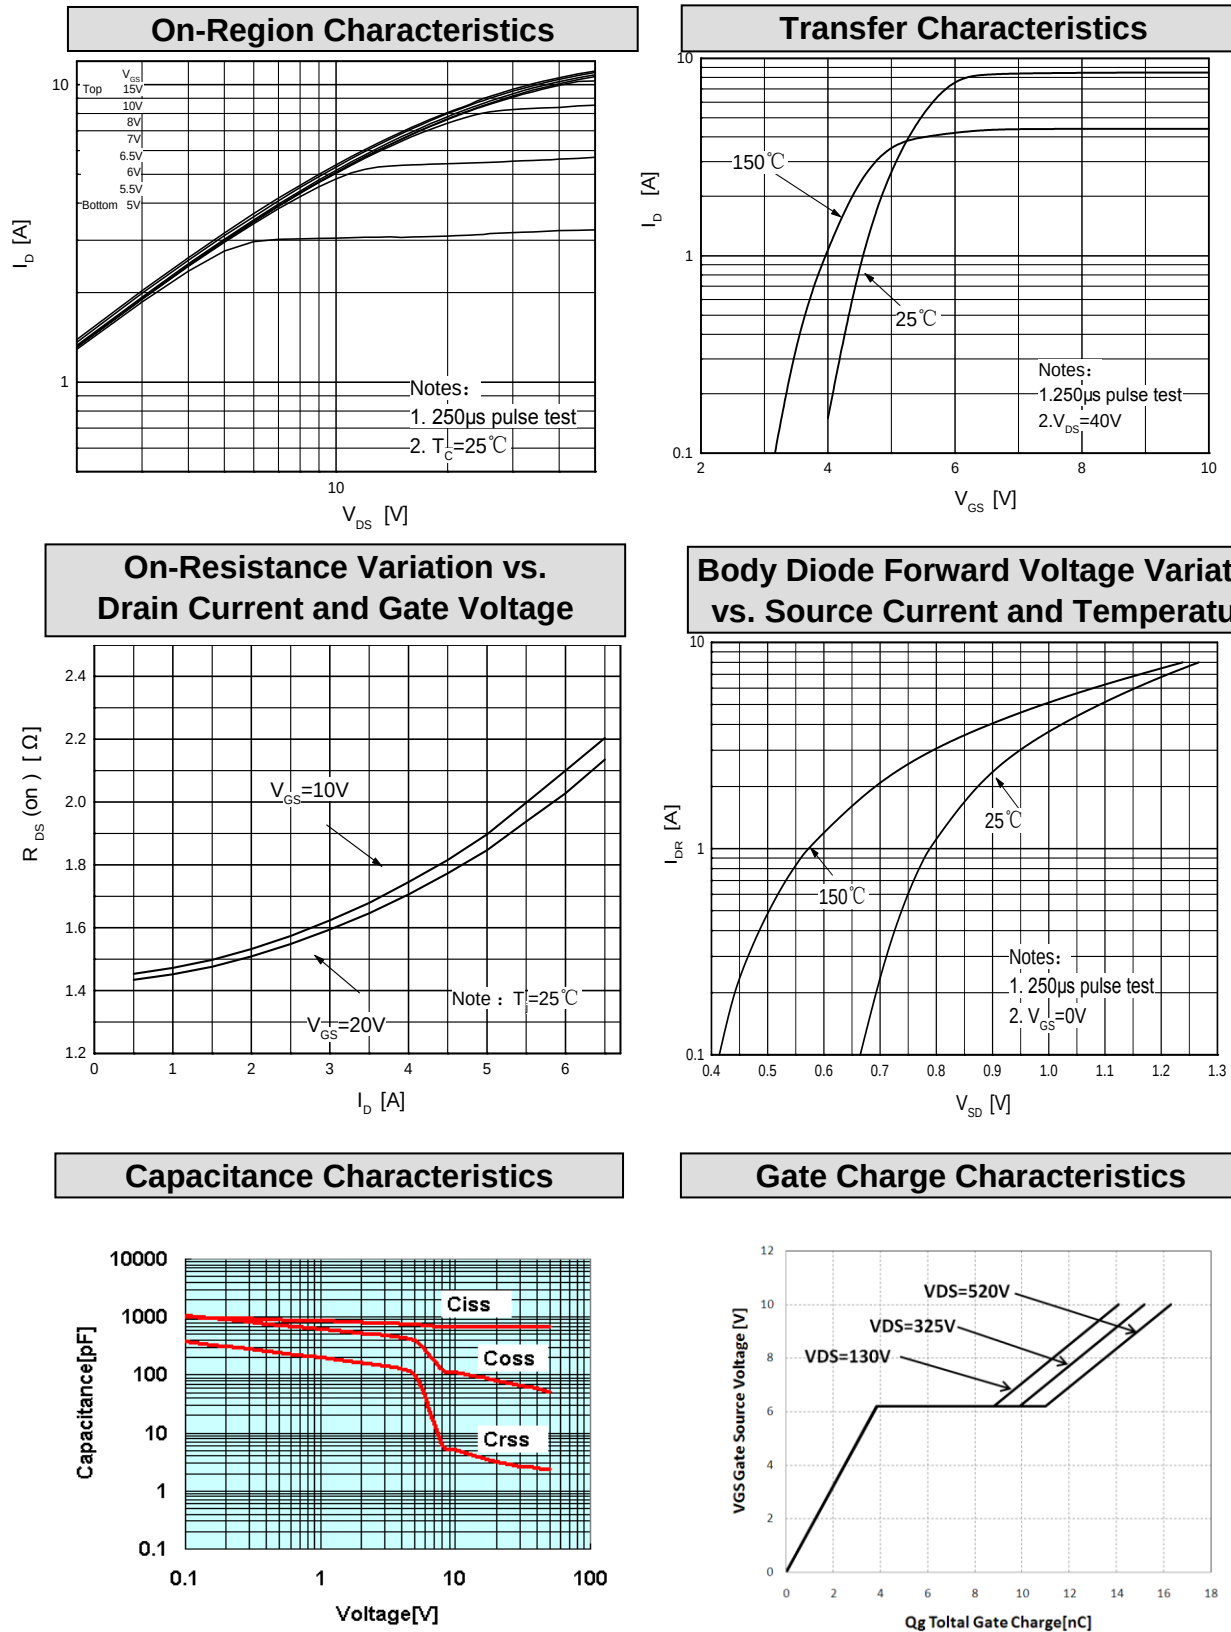


特征曲线 ELECTRICAL CHARACTERISTICS (curves)

Breakdown Voltage Variation vs. Temperature

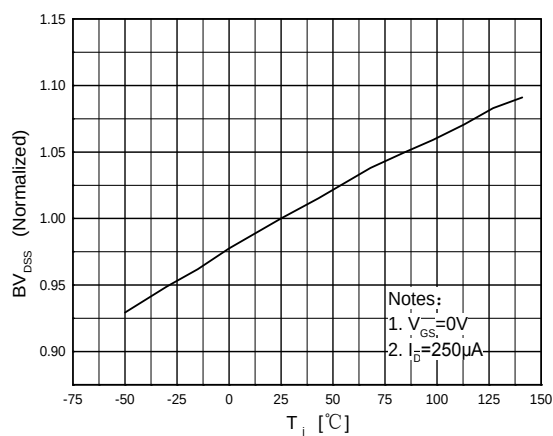


On-Resistance Variation vs. Temperature

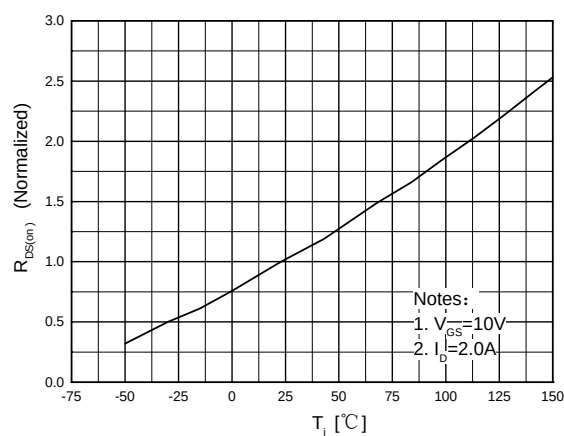

Maximum Safe Operating Area For JCS4N65(V/R/C/B/S)B




Maximum Safe Operating Area For JCS4N65FB(TO-220MF)

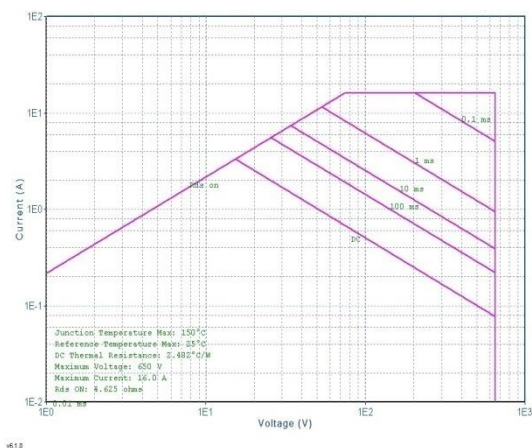


Maximum Safe Operating Area For JCS4N65FB(TO-220MF-K2)




Maximum Drain Current vs. Case Temperature

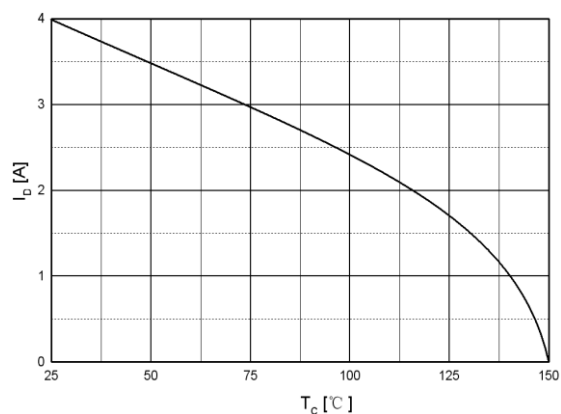


**Gate Threshold Voltage
vs. Temperature**

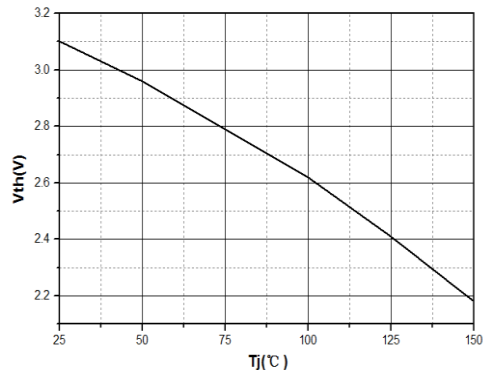

**Power Dissipation Variation
vs. Temperature**

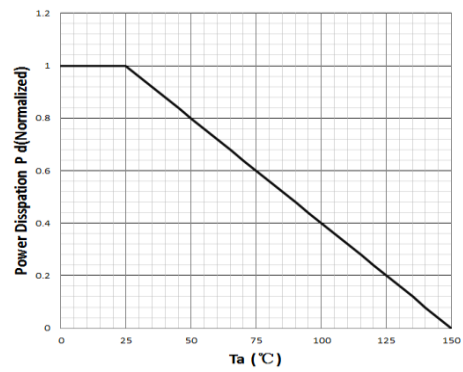


**Avalanche Energy & Inductor
vs. Temperature**

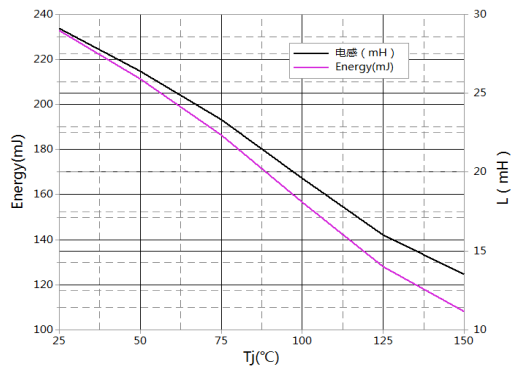


特征曲线 ELECTRICAL CHARACTERISTICS (curves)


Transient Thermal Response Curve For JCS4N65(V/R)B

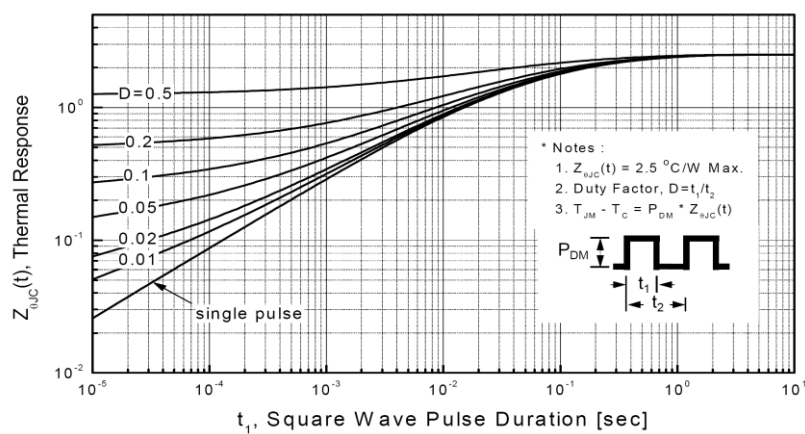


Transient Thermal Response Curve For JCS4N65CB/BB/SB

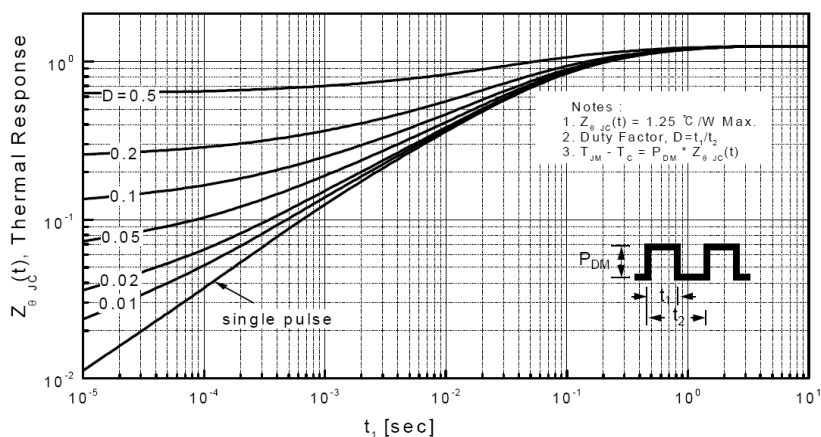

Transient Thermal Response Curve For JCS4N65FB(TO-220MF)

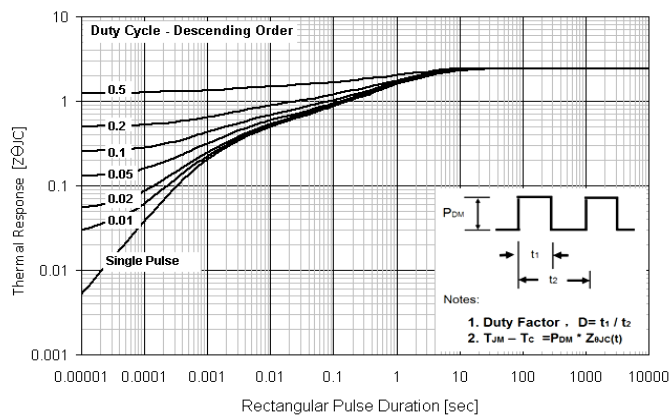



Transient Thermal Response Curve For JCS4N65FB(TO-220MF-K2)

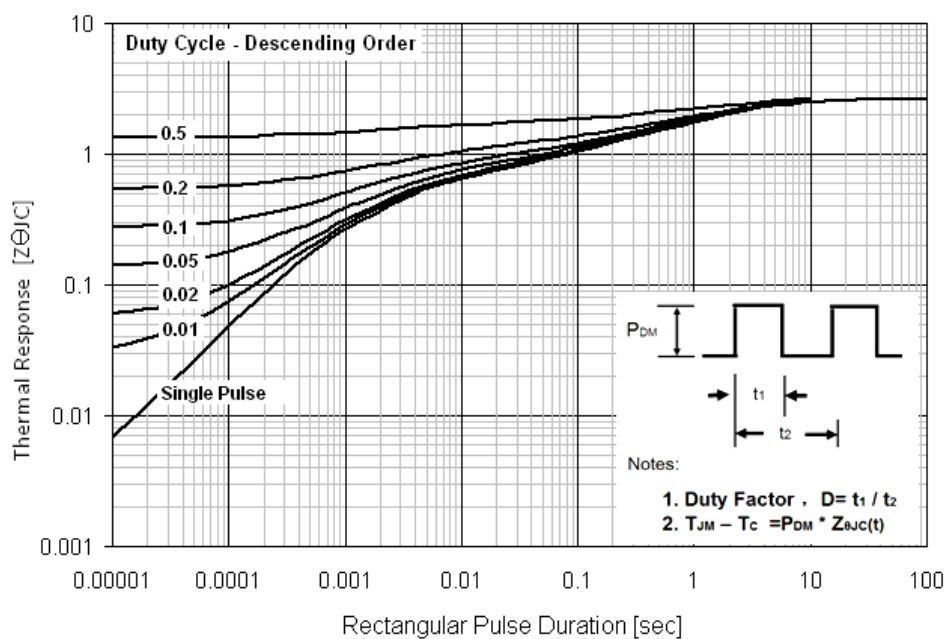


外形尺寸 PACKAGE MECHANICAL DATA

IPAK

单位 Unit: mm

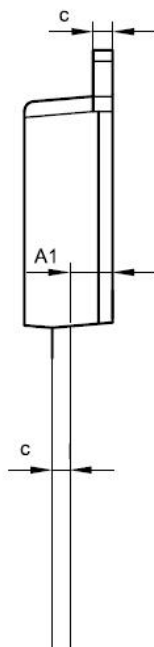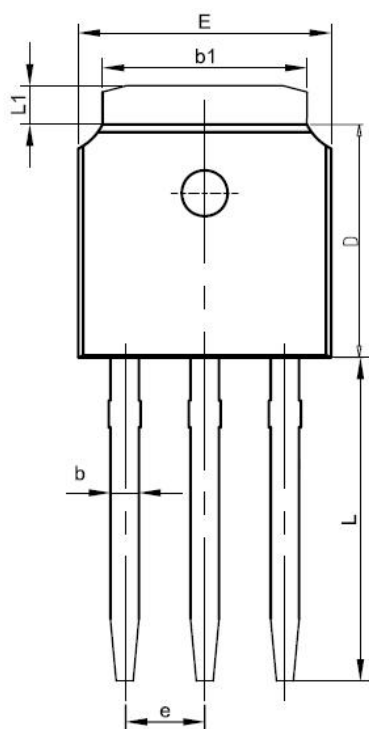

SYMBOL	MM	
	MIN	MAX
A	2.1	2.5
A1	0.87	1.27
b	0.63	0.93
b1	5.13	5.53
c	0.40	0.60
D	5.80	6.40
E	6.30	6.90
L	9.10	9.70
e	2.286BSC	
L1	0.82	1.22







JCS4N65B


外形尺寸 PACKAGE MECHANICAL DATA

DPAK


单位 Unit: mm

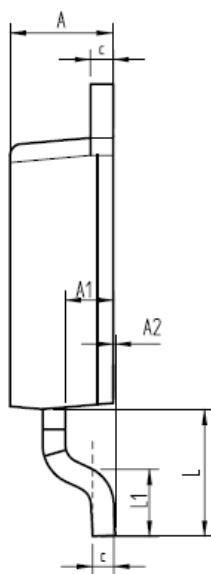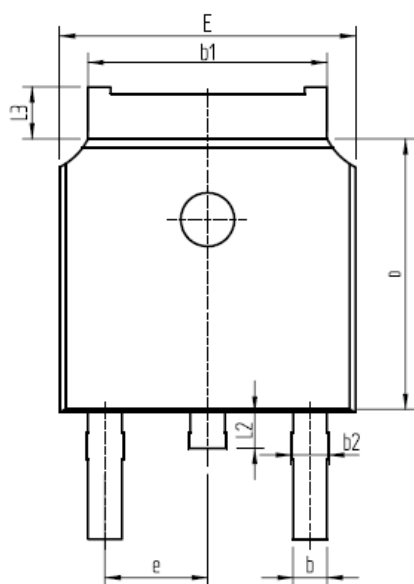

SYMBOL	mm	
	MIN	MAX
A	2.16	2.41
A1	0.97	1.17
A2	0.00	0.15
b	0.63	0.93
b1	5.13	5.53
b2	0.66	0.96
c	0.40	0.60
D	5.80	6.40
E	6.30	6.90
e	2.286BSC	
L	2.50	3.30
L1	1.20	1.80
L2	0.60	1.00
L3	0.85	1.30




编带 REEL

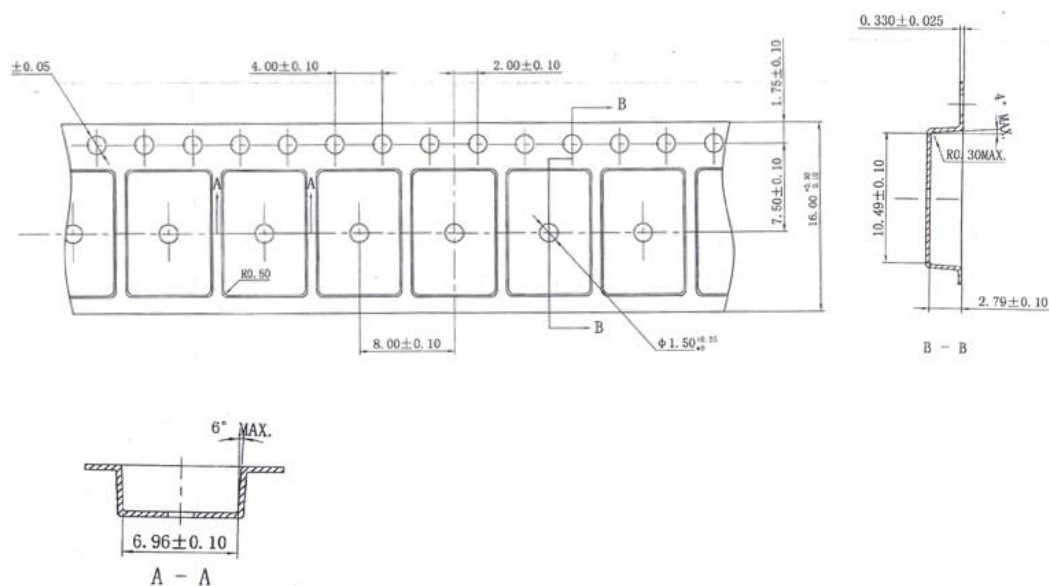

外形尺寸 PACKAGE MECHANICAL DATA

TO-220C

单位 Unit: mm


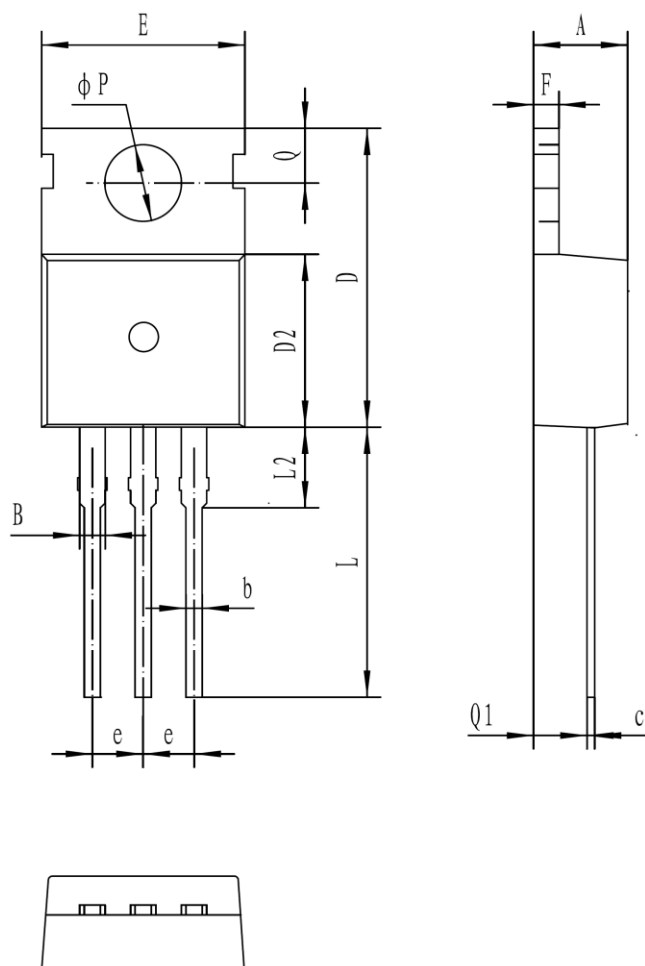


符号 symbol	MIN	MAX
A	4.30	4.70
B	1.10	1.40
b	0.70	0.95
c	0.40	0.65
D	15.20	16.20
D2	9.00	9.40
E	9.70	10.10
e	2.39	2.69
F	1.25	1.40
L	12.60	13.60
L2	2.80	3.20
Q	2.60	3.00
Q1	2.20	2.60
P	3.50	3.80


外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF

单位 Unit: mm

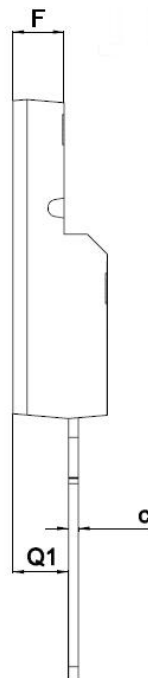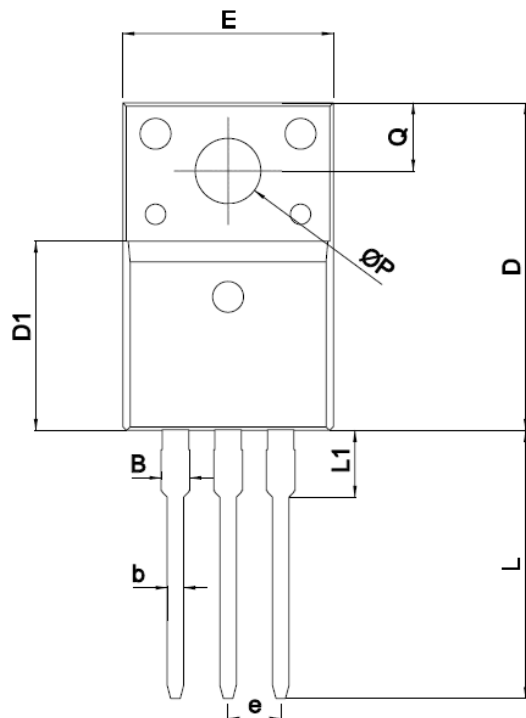


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.47
b	0.7	0.9
c	0.45	0.60
D	15.67	16.07
D1	9.04	9.20
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.58	13.38
L1	3.13	3.33
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28



外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF-K2

单位 Unit: mm

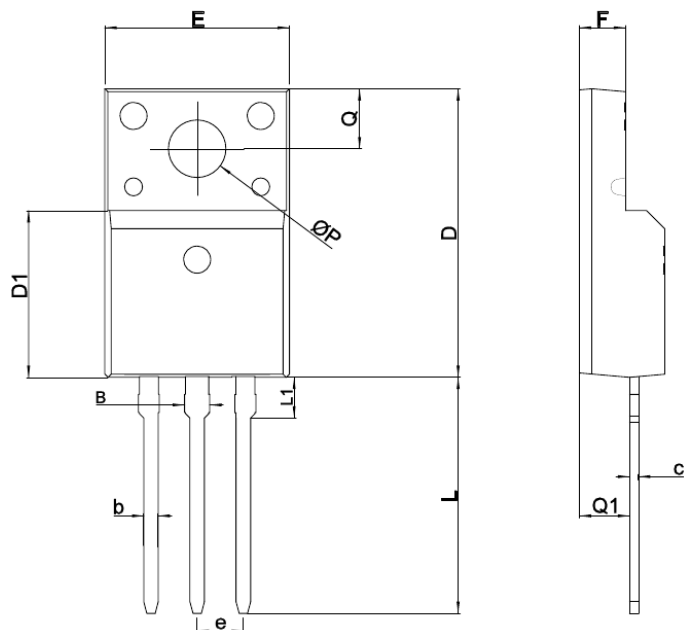


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.27
b	0.59	0.79
c	0.45	0.60
D	15.67	16.07
D1	8.97	9.37
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.65	13.35
L1	1.80	2.20
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28


外形尺寸 PACKAGE MECHANICAL DATA

TO-262

单位 Unit: mm

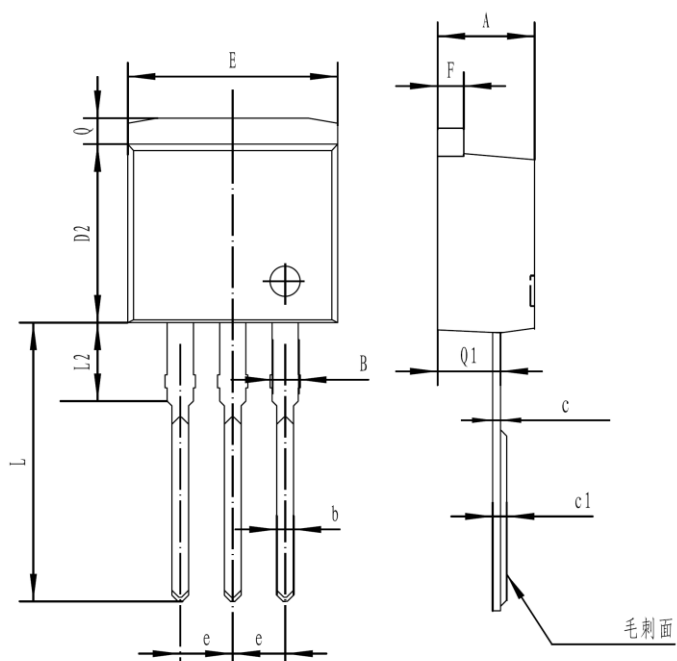


符号 symbol	MIN	MAX
A	4.40	4.90
B	1.10	1.40
b	0.70	0.95
c	0.30	0.60
c1	0.33	0.63
D2	8.20	9.20
E	9.60	10.50
e	2.39	2.69
F	1.20	1.35
L	13.11	14.61
L2	3.55	4.05
Q	1.10	1.40
Q1	2.65	2.85



外形尺寸 PACKAGE MECHANICAL DATA



TO-263

单位 Unit: mm

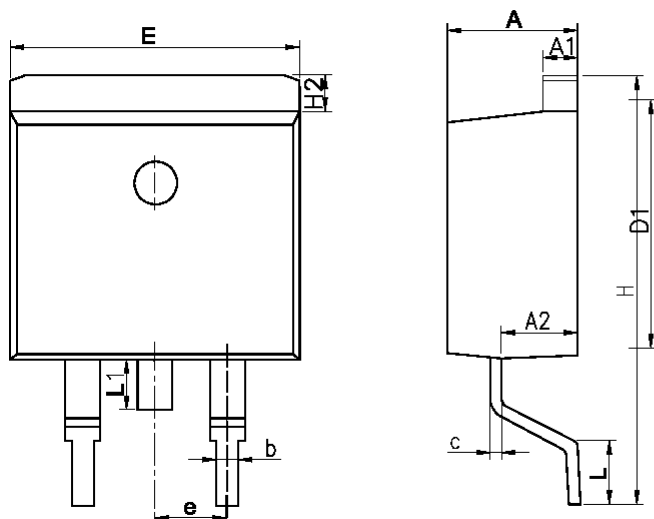


SYMBOL	MM	
	MIN	MAX
A	4.30	4.80
A1	1.12	1.42
A2	2.54	2.84
b	0.67	1.00
c	0.29	0.52
D1	8.40	9.00
E	9.80	10.46
e	2.54BSC	
H	14.00	16.00
H2	1.12	1.45
L	1.50	3.10
L1	1.45	1.70

编带 REEL

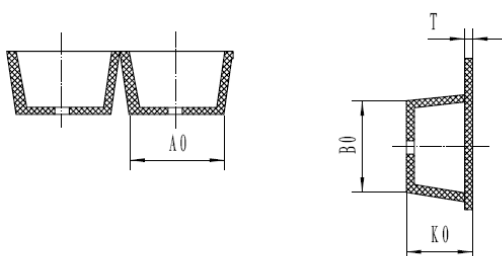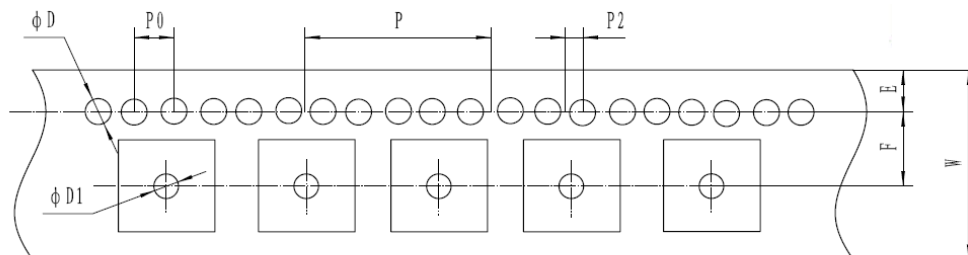

产品尺寸规格 (UNIT: mm)				
规格	W	A0	E	F
尺寸	24 ± 0.3	10.9 ± 0.1	1.75 ± 0.1	11.5 ± 0.1
规格	D1	P0	P2	P
尺寸	1.5 ± 0.1/-0	4 ± 0.1	2 ± 0.1	16 ± 0.1
规格	K0	B0		
尺寸	4.9 ± 0.1	16.0 ± 0.1		

外形尺寸 PACKAGE MECHANICAL DATA

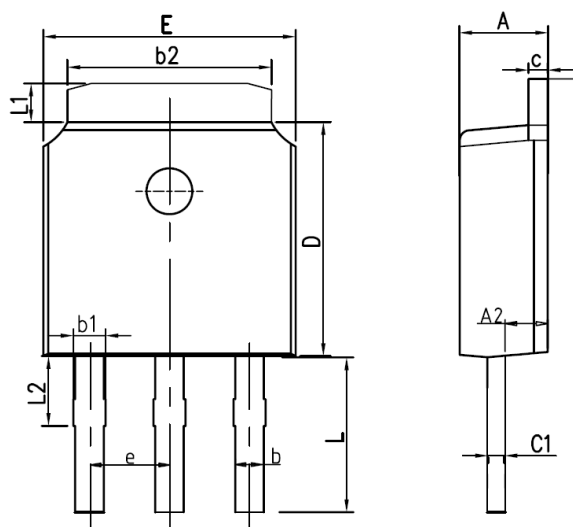IPAK S1
单位 Unit: mm


SYMBOL	MM	
	MIN	MAX
A	2.15	2.45
A2	0.92	1.22
b	0.68	0.88
b1	0.61	0.95
b2	5.18	5.48
c	0.43	0.63
c1	0.41	0.61
D	5.95	6.25
E	6.45	6.75
e	2.286BSC	
L	3.35	3.65
L1	0.80	1.25
L2	0.90	1.20