

JCS7N65B

主要参数 MAIN CHARACTERISTICS

ID	7.0 A
V _{DSS}	650 V
R _{dson-max} (@V _{GS} =10V)	1.3 Ω
Q _{G-typ}	25 nC

用途

- 高频开关电源
- 电子镇流器
- LED 电源

APPLICATIONS

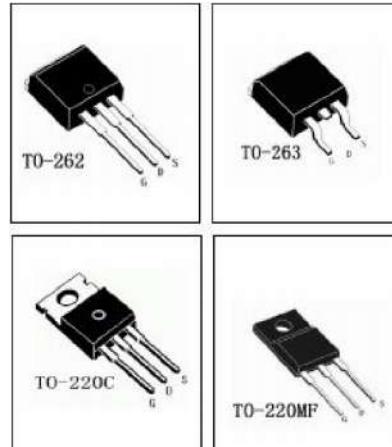

- High frequency switching mode power supply
- Electronic ballast
- LED power supply

产品特性

- 低栅极电荷
- 低 C_{rss} (典型值 16pF)
- 开关速度快
- 产品全部经过雪崩测试
- 高抗 dv/dt 能力
- RoHS 产品

FEATURES

- Low gate charge
- Low C_{rss} (typical 16pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product

封装 Package

订货信息 ORDER MESSAGE

订货型号 Order codes				印 记 Marking	封 装 Package
有卤-条管 Halogen-Tube	无卤-条管 Halogen-Free-Tube	有卤-编带 Halogen-Reel	无卤-编带 Halogen-Free-Reel		
JCS7N65BB-B-B	JCS7N65BB-B-BR	N/A	N/A	JCS7N65BB	TO-262
JCS7N65SB-S-B	JCS7N65SB-S-BR	JCS7N65SB-S-A	JCS7N65SB-S-AR	JCS7N65SB	TO-263
JCS7N65CB-C-B	JCS7N65CB-C-BR	N/A	N/A	JCS7N65CB	TO-220C
JCS7N65FB-F-B	JCS7N65FB-F-BR	N/A	N/A	JCS7N65FB	TO-220MF



JCS7N65B

绝对最大额定值 ABSOLUTE RATINGS ($T_c=25^\circ\text{C}$)

项 目 Parameter	符 号 Symbol	数 值 Value		数 值 Value
		JCS7N65 CB/SB/BB	JCS7N65FB (TO-220MF)	
最高漏极—源极直流电压 Drain-Source Voltage	V_{DSS}	650	650	V
连续漏极电流 Drain Current -continuous	I_D	7.0	7.0*	A
	$T=25^\circ\text{C}$		4.3	A
最大脉冲漏极电流 (注 1) Drain Current - pulse (note 1)	I_{DM}	28	28*	A
最高栅源电压 Gate-Source Voltage	V_{GSS}	± 30		V
单脉冲雪崩能量 (注 2) Single Pulsed Avalanche Energy (note 2)	E_{AS}	590		mJ
雪崩电流 (注 1) Avalanche Current (note 1)	I_{AR}	7.0		A
重复雪崩能量 (注 1) Repetitive Avalanche Energy (note 1)	E_{AR}	14.0		mJ
二极管反向恢复最大电压 变化速率 (注 3) Peak Diode Recovery dv/dt (note 3)	dv/dt	4.5		V/ns
耗散功率 Power Dissipation	P_D	142	50	W
	$T_c=25^\circ\text{C}$ -Derate above 25°C	1.14	0.4	W/ $^\circ\text{C}$
最高结温及存储温度 Operating and Storage Temperature Range	T_J, T_{STG}	-55~+150		$^\circ\text{C}$
引线最高焊接温度 Maximum Lead Temperature for Soldering Purposes	T_L	300		$^\circ\text{C}$

*漏极电流由最高结温限制



*Drain current limited by maximum junction temperature

电特性 ELECTRICAL CHARACTERISTICS

项 目 Parameter	符 号 Symbol	测 试 条 件 Tests conditions	最 小 Min	典 型 Typ	最 大 Max	单 位 Units
关态特性 Off -Characteristics						
漏—源击穿电压 Drain-Source Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	650	-	-	V
击穿电压温度特性 Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	$I_D=250\mu A$, referenced to $25^\circ C$	-	0.65	-	$V/^\circ C$
零栅压下漏极漏电流 Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V, V_{GS}=0V, T_c=25^\circ C$	-	-	10	μA
		$V_{DS}=520V, T_c=125^\circ C$	-	-	100	μA
正向栅极体漏电流 Gate-body leakage current, forward	I_{GSSF}	$V_{DS}=0V, V_{GS}=30V$	-	-	100	nA
反向栅极体漏电流 Gate-body leakage current, reverse	I_{GSSR}	$V_{DS}=0V, V_{GS}=-30V$	-	-	-100	nA
通态特性 On-Characteristics						
阈值电压 Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D=250\mu A$	2.0	-	4.0	V
静态导通电阻 Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=3.5A$	-	1.1	1.3	Ω
正向跨导 Forward Transconductance	g_{fs}	$V_{DS}=40V, I_D=3.5A$ (note 4)	-	6.2	9	S
动态特性 Dynamic Characteristics						
输入电容 Input capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V, f=1.0MHz$	-	1120	1350	pF
输出电容 Output capacitance	C_{oss}		-	115	150	pF
反向传输电容 Reverse transfer capacitance	C_{rss}		-	23	30	pF

电特性 ELECTRICAL CHARACTERISTICS

开关特性 Switching Characteristics							
延迟时间 Turn-On delay time	$t_{d(on)}$	$V_{DD}=300V, I_D=7A, R_G=25\Omega$ (note 4, 5)	-	30	70	ns	
上升时间 Turn-On rise time	t_r		-	80	170	ns	
延迟时间 Turn-Off delay time	$t_{d(off)}$		-	125	260	ns	
下降时间 Turn-Off Fall time	t_f		-	60	110	ns	
栅极电荷总量 Total Gate Charge	Q_g	$V_{DS} = 520V, I_D = 7A$ $V_{GS} = 10V$ (note 4, 5)	-	25	35	nC	
栅一源电荷 Gate-Source charge	Q_{gs}		-	6.0	-	nC	
栅一漏电荷 Gate-Drain charge	Q_{gd}		-	10	-	nC	
漏一源二极管特性及最大额定值 Drain-Source Diode Characteristics and Maximum Ratings							
正向最大连续电流 Maximum Continuous Drain -Source Diode Forward Current	I_S			-	-	7.5 A	
正向最大脉冲电流 Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}			-	-	30 A	
正向压降 Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V, I_S=7.0A$	-	-	1.4	V	
反向恢复时间 Reverse recovery time	t_{rr}	$V_{GS}=0V, I_S=7.0A$ $dI_F/dt=100A/\mu s$ (note 4)	-	315	-	ns	
反向恢复电荷 Reverse recovery charge	Q_{rr}		-	2.6	-	μC	

热特性 THERMAL CHARACTERISTIC

项 目 Parameter	符 号 Symbol	最 大 Max			单 位 Unit
		JCS7N65 CB/SB/BB	JCS7N65FB (TO-220MF)		
结到管壳的热阻 Thermal Resistance, Junction to Case	$R_{th(j-c)}$	0.85		2.5	°C/W
结到环境的热阻 Thermal Resistance, Junction to Ambient	$R_{th(j-A)}$	62.5		38.4	°C/W

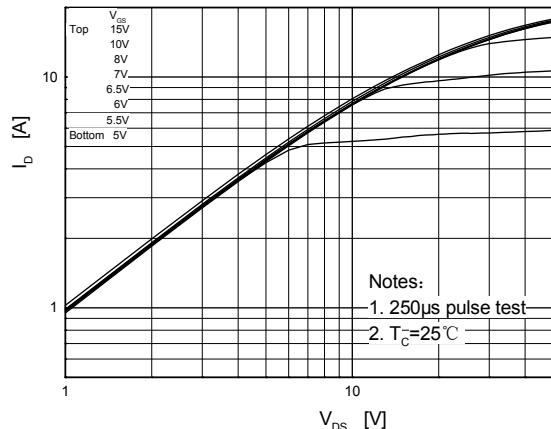
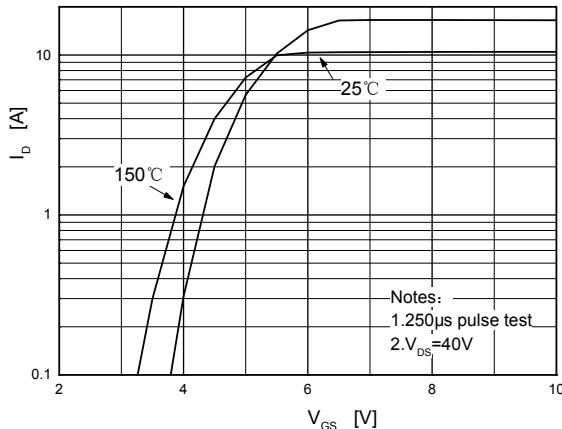
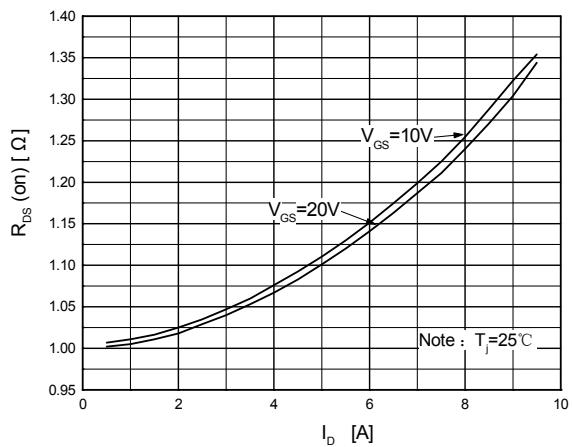
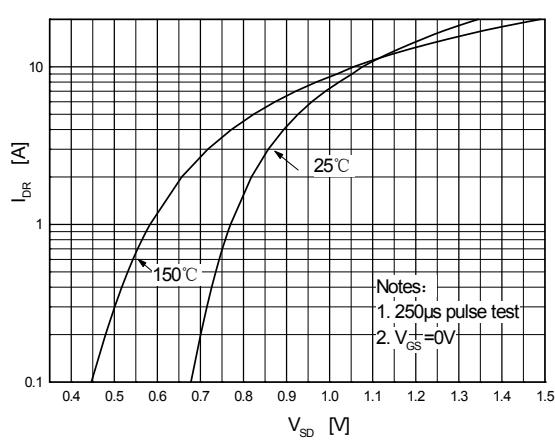
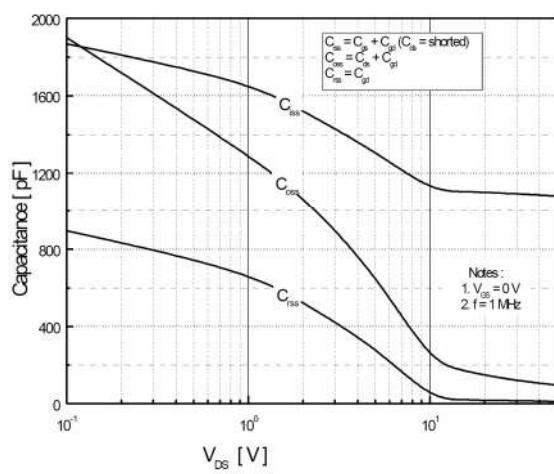
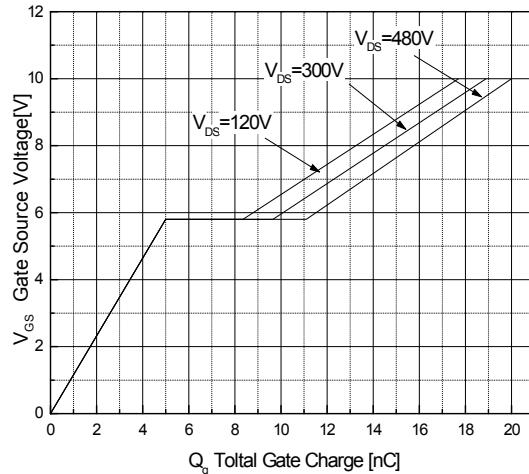
注释:






- 1: 脉冲宽度由最高结温限制
- 2: $L=19.5mH, I_{AS}=7.0A, V_{DD}=50V, R_G=25\Omega$,起始
结温 $T_J=25^\circ C$
- 3: $I_{SD} \leq 7.0A, di/dt \leq 300A/\mu s, V_{DD} \leq BV_{DSS}$,起始结温
 $T_J=25^\circ C$
- 4: 脉冲测试: 脉冲宽度 $\leq 300\mu s$,占空比 $\leq 2\%$
- 5: 基本与工作温度无关

版本: 201806I



Notes:

- 1 : Pulse width limited by maximum junction temperature
- 2: $L=19.5mH, I_{AS}=7.0A, V_{DD}=50V, R_G=25\Omega$,Starting
 $T_J=25^\circ C$
- 3 : $I_{SD} \leq 7.0A, di/dt \leq 300A/\mu s, V_{DD} \leq BV_{DSS}$, Starting
 $T_J=25^\circ C$
- 4: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$
- 5: Essentially independent of operating temperature

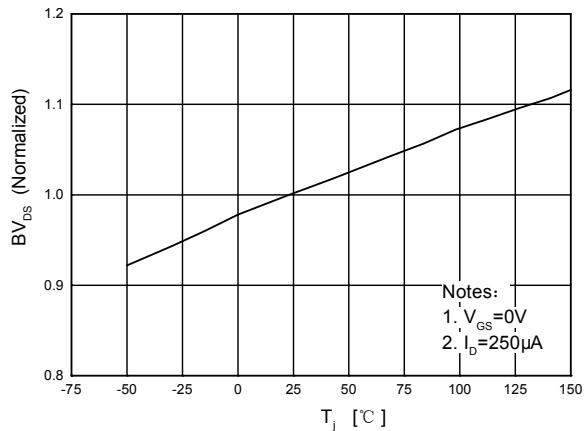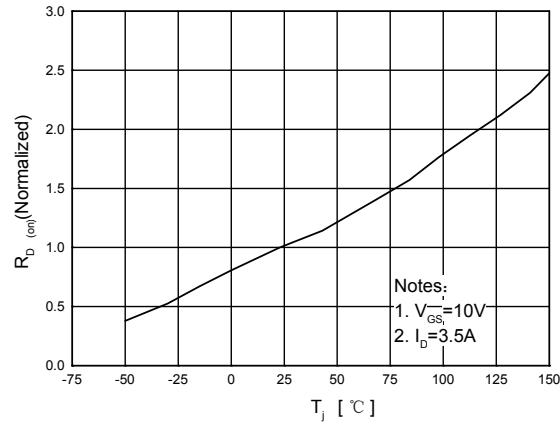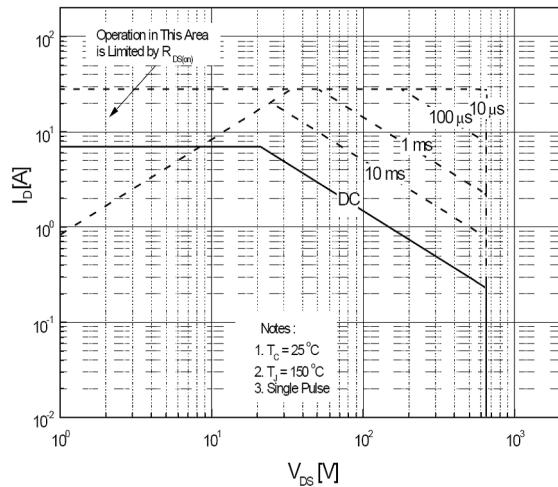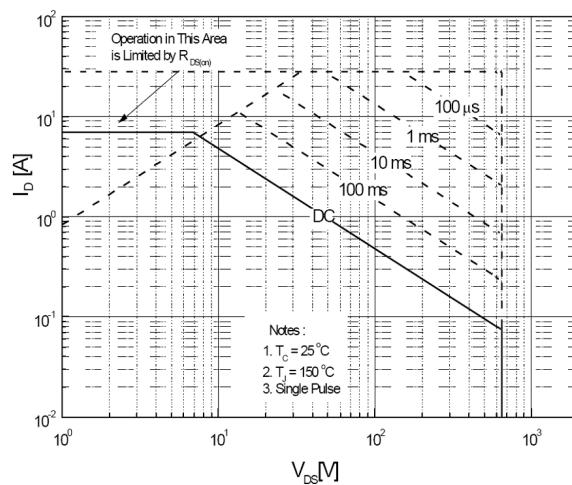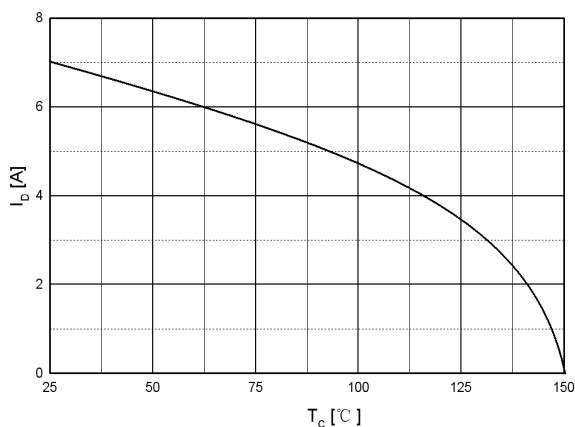特征曲线 ELECTRICAL CHARACTERISTICS (curves)
On-Region Characteristics

Transfer Characteristics

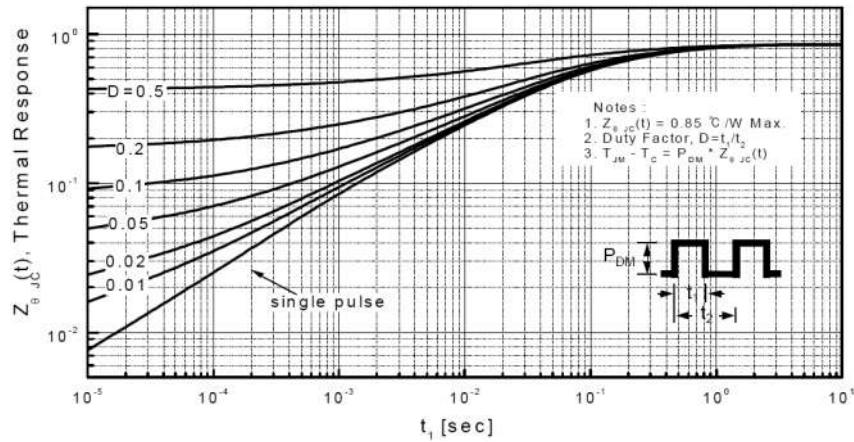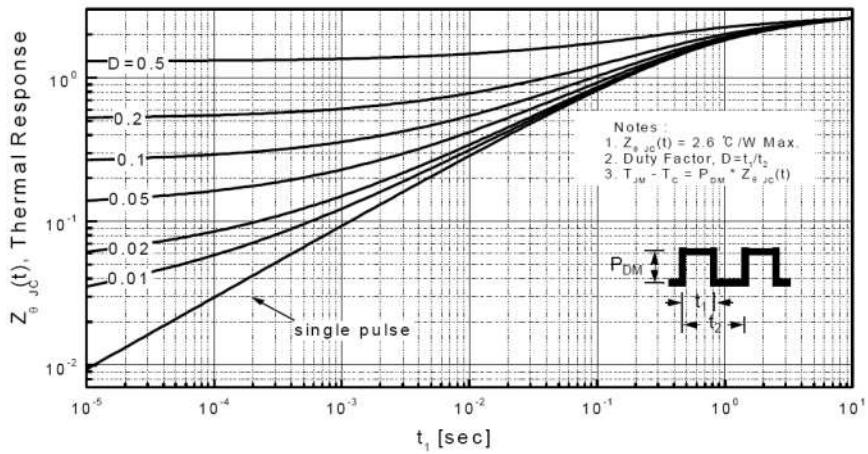**On-Resistance Variation vs.
Drain Current and Gate Voltage**

**Body Diode Forward Voltage Variation
vs. Source Current and Temperature**

Capacitance Characteristics

Gate Charge Characteristics


特征曲线 ELECTRICAL CHARACTERISTICS (curves)
**Breakdown Voltage Variation
vs. Temperature**

**On-Resistance Variation
vs. Temperature**

**Maximum Safe Operating Area
For JCS7N65CB/SB/BB**

**Maximum Safe Operating Area
For JCS7N65FB(TO-220MF)**

**Maximum Drain Current
vs. Case Temperature**


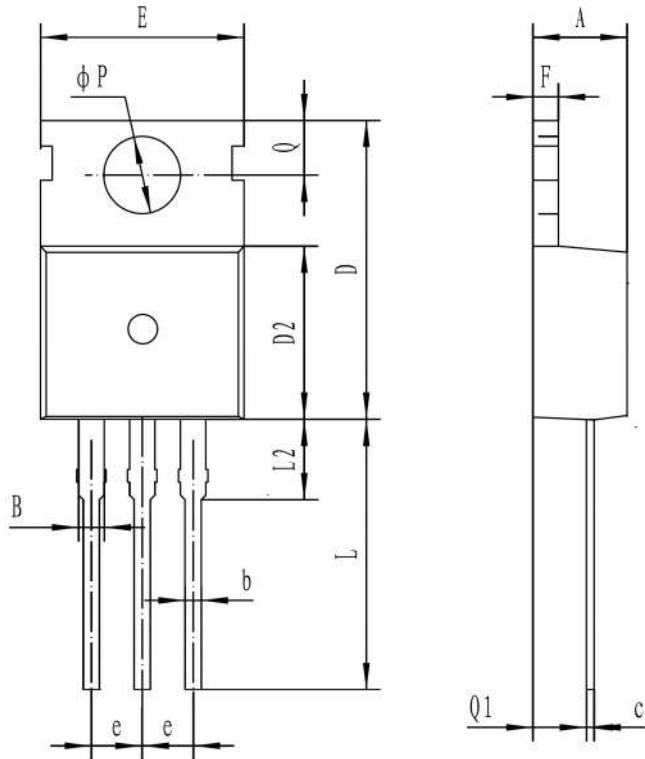
特征曲线 ELECTRICAL CHARACTERISTICS (curves)

**Transient Thermal Response Curve
For JCS7N65CB/SB/BB**

**Transient Thermal Response Curve
For JCS7N65FB(TO-220MF)**


外形尺寸 PACKAGE MECHANICAL DATA

TO-220C

单位 Unit: mm




符号 symbol	MIN	MAX
A	4.30	4.70
B	1.10	1.40
b	0.70	0.95
c	0.40	0.65
D	15.20	16.20
D2	9.00	9.40
E	9.70	10.10
e	2.39	2.69
F	1.25	1.40
L	12.60	13.60
L2	2.80	3.20
Q	2.60	3.00
Q1	2.20	2.60
P	3.50	3.80




外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF

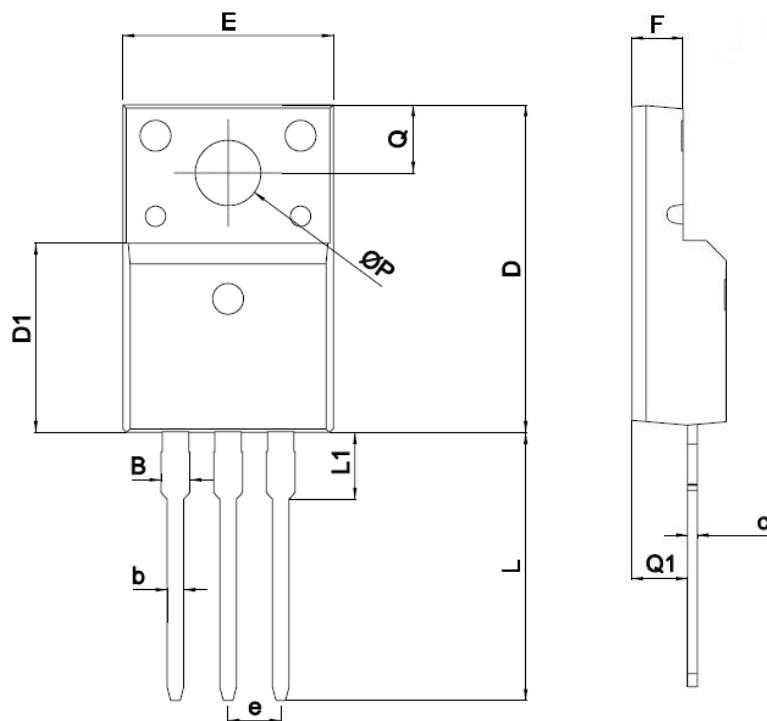单位 Unit: mm




SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.47
b	0.7	0.9
c	0.45	0.60
D	15.67	16.07
D1	9.04	9.20
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.58	13.38
L1	3.13	3.33
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28



外形尺寸 PACKAGE MECHANICAL DATA

TO-262

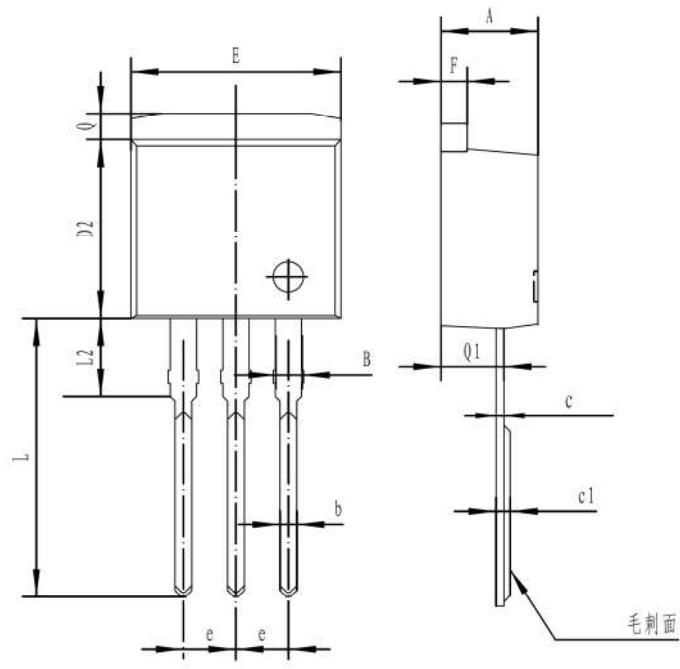单位 Unit: mm




符号 symbol	MIN	MAX
A	4.40	4.90
B	1.10	1.40
b	0.70	0.95
c	0.30	0.60
c1	0.33	0.63
D2	8.20	9.20
E	9.60	10.50
e	2.39	2.69
F	1.20	1.35
L	13.11	14.61
L2	3.55	4.05
Q	1.10	1.40
Q1	2.65	2.85



外形尺寸 PACKAGE MECHANICAL DATA



TO-263

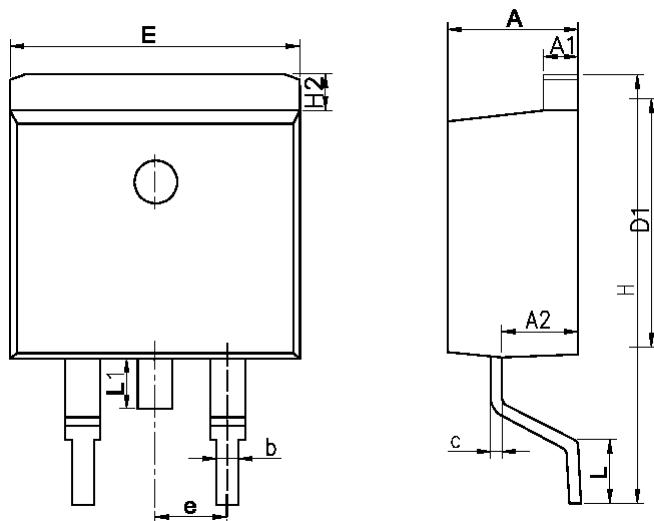单位 Unit: mm



SYMBOL	MM	
	MIN	MAX
A	4.30	4.80
A1	1.12	1.42
A2	2.54	2.84
b	0.67	1.00
c	0.29	0.52
D1	8.40	9.00
E	9.80	10.46
e	2.54BSC	
H	14.00	16.00
H2	1.12	1.45
L	1.50	3.10
L1	1.45	1.70

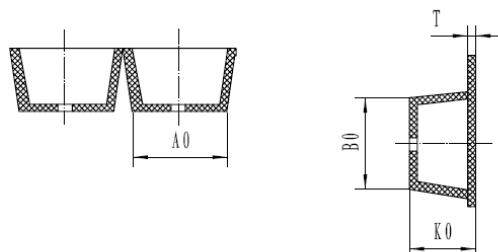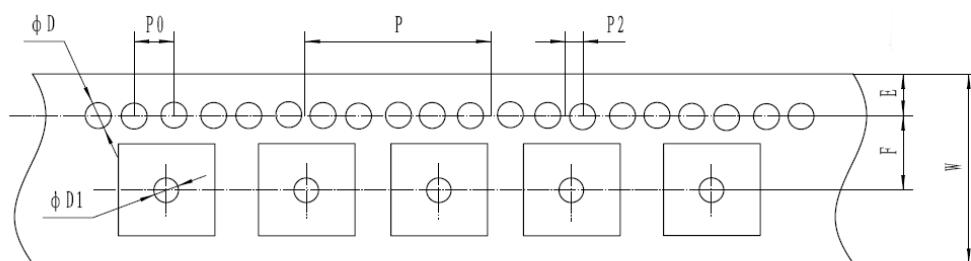编带 REEL



产品尺寸规格 (UNIT:mm)				
规格	A0	E	F	D
尺寸	10.9 ± 0.1	1.75 ± 0.1	11.5 ± 0.1	1.5 +0.1/-0
规格	P0	P2	P	T
尺寸	4 ± 0.1	2 ± 0.1	16 ± 0.1	0.35 ± 0.05
规格	B0			
尺寸	4.9 ± 0.1	16.0 ± 0.1		